




## Daylight Boxer 800W

### SPECIFICATIONS

Identity No.	L00800BX
Capacity	800W
Lamp Bulb Voltage	9.3A / 95V AC
Par Lens	Ø175mm (6-7/8 in.)
Lamp Type	HMI 800W SE
Color Temp.	5600K
Lamp Holder	G22
Stirrup	Ø16mm (5/8 in.) Socket
Class / IP Rating	1 / IP 20
Max. Surface Temp.	170 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	6 m
Min. Distance to Flammable Object	0.5 m
Operating Range	+45° ~ 0° ~ -45°
Weight (without barndoor)	2.5 kg

### DIMENSIONS (mm)

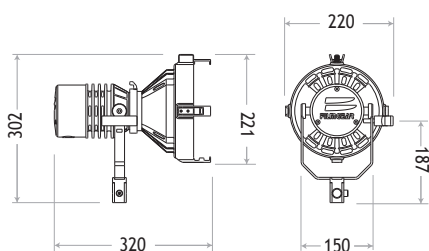

### PHOTOMETRIC DATA

		6m	9m	12m
800W Spot (8°)	Lux	58748	26110	14687
	Beam Ø	0.84 m	1.26 m	1.68 m
Medium Flood (10° x 20°)	Lux	8838	3928	2209
	Beam Ø	1.05 x 2.12 m	1.57 x 3.17 m	2.10 x 4.23 m
Wide Flood (20° x 45°)	Lux	5081	2258	1270
	Beam Ø	2.16 x 4.97 m	3.17 x 7.46 m	4.23 x 9.94 m
Super Wide Flood (40°)	Lux	1843	819	461
	Beam Ø	4.37 m	6.55 m	8.74 m
Frosted Super Flood (37°)	Lux	1089	484	272
	Beam Ø	4.02 m	6.02 m	8.03 m

### LAMPHAED CONTENTS

- Lamp Housing without Bulb (purple grey color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Set of 5 Par Lenses Ø175mm (6-7/8 in.) with Lens Case
- Power Cable with Multi-Pin Connector
- Stirrup with Ø16mm (5/8 in.) Socket
- Glass Beaker
- # Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

### ACCESSORIES

- Electronic Ballast V3 : 1.8kW/1.2kW/800W or 800W/575W or 800W/575W AC/DC
- Lamphead to Ballast Cable : 7m (23 ft.) or 15m (49 ft.)
- DC Y-Cable
- 4-leaf Rotatable Barndoor
- Set of 5 Par Lenses Ø175mm (6-7/8 in.) with Lens Case
  - Spot, Medium Flood, Wide Flood, Super Wide Flood, Frosted Super Flood
- Glass Beaker
- Safety Cable (for lamphead)
- Safety Wire (for barndoor)