


Daylight Boxer 400W



■ SPECIFICATIONS

Identity No.	L00400BX
Capacity	400W
Lamp Bulb Voltage	6.3A / 70V AC
Par Lens	Ø130mm (5-1/8 in.)
Lamp Type	HMI 400W SE
Color Temp.	5600K
Lamp Holder	GZZ9.5
Stirrup	Ø16mm (5/8 in.) Socket
Class / IP Rating	1 / IP 20
Max. Surface Temp.	170 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	3 m
Min. Distance to Flammable Object	0.5 m
Operating Range	+45° ~ 0° ~ -45°
Weight (without barndoor)	1.3 kg

■ DIMENSIONS (mm)

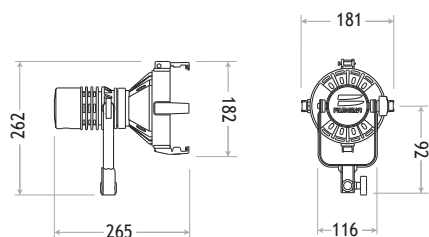

■ PHOTOMETRIC DATA

		3m	5m	7m
400W	Spot (9°)	Lux 173271	62378	31825
	Beam Ø	0.47 m	0.79 m	1.10 m
Medium Flood (10° x 20°)	Lux	17058	6141	3133
	Beam Ø	0.52 x 1.06 m	0.87 x 1.76 m	1.22 x 2.47 m
Wide Flood (20° x 42°)	Lux	4982	1794	915
	Beam Ø	1.06 x 2.30 m	1.76 x 3.84 m	2.47 x 5.37 m
Super Wide Flood (40°)	Lux	2110	760	388
	Beam Ø	2.18 m	3.64 m	5.10 m
Frosted Super Flood (34°)	Lux	1616	582	297
	Beam Ø	1.83 m	3.06 m	4.28 m

■ LAMPHAED CONTENTS

- Lamp Housing without Bulb (purple grey color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Set of 5 Par Lenses Ø130mm (5-1/8 in.) with Lens Case
- Power Cable with Multi-Pin Connector
- Stirrup with Ø16mm (5/8 in.) Socket
- Glass Beaker
- # Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

■ ACCESSORIES

- Electronic Ballast V3 : 400W/200W or 400W/200W AC/DC
- Lamphead to Ballast Cable : 7m (23 ft.) or 15m (49 ft.)
- DC Cable
- 4-leaf Rotatable Barndoor
- Set of 5 Par Lenses Ø130mm (5-1/8 in.) with Lens Case
 - Spot, Medium Flood, Wide Flood, Super Wide Flood, Frosted Super Flood
- Glass Beaker
- Safety Cable (for lamphead)
- Safety Wire (for barndoor)