


Daylight Fresnel 12000W SE



■ SPECIFICATIONS

Identity No.	L12000DS
Capacity	12,000W
Lamp Bulb Voltage	160V
Fresnel Lens	Ø500mm (19-5/8 in.)
Lamp Type	MSR 12000HR or HMI 12000W/SE
Color Temp.	5600K
Lamp Holder	GX38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	200 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	15 m
Min. Distance to Flammable Object	2 m
Operating Range	+38° ~ 0° ~ -38°
Weight (lamphead)	51.0 kg
Weight (with barndoor)	55.5 kg

■ DIMENSIONS (mm)

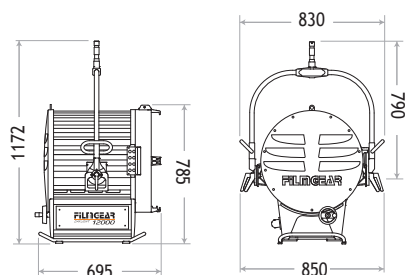

■ PHOTOMETRIC DATA

	15m	25m	35m
12000W			
Spot (6°)			
Lux	39727	14302	7297
Beam Ø	1.57 m	2.62 m	3.67 m
Flood (54°)			
Lux	2397	863	440
Beam Ø	15.29 m	25.48 m	35.67 m

■ LAMPHEAD CONTENTS

Lamp Housing without Bulb (purple grey & silver color)

4-leaf Rotatable Barndoor with Safety Wire

Ø500mm (19-5/8 in.) Fresnel Lens

Power Cable with Multi-Pin Connector

Stirrup with Ø28mm (1-1/8 in.) Spigot

Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

■ ACCESSORIES

Electronic Ballast V3 : 18kW/12kW/6kW or 18kW/12kW or 12kW/9kW/6kW or 12kW/6kW
Lamphead to Ballast Cable : 15m (49 ft.) or 20m (66 ft.)

4-leaf Rotatable Barndoor

Set of 4 Scrims Ø622mm (24-1/2 in.) : Full Single, Full Double, Half Single, Half Double
Scrim Bag

Safety Cable (for lamphead)

Safety Wire (for barndoor)