


Daylight Boxer 200W



■ SPECIFICATIONS

Identity No.	L00200BX
Capacity	200W
Lamp Bulb Voltage	3.1A / 70V AC
Par Lens	Ø112mm (4-3/8 in.)
Lamp Type	HMI 200W SE
Color Temp.	5600K
Lamp Holder	GZY9.5
Stirrup	Ø16mm (5/8 in.) Socket
Class / IP Rating	1 / IP 20
Max. Surface Temp.	170 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	2 m
Min. Distance to Flammable Object	0.5 m
Operating Range	+45° ~ 0° ~ -45°
Weight (without barndoor)	1.2 kg

■ DIMENSIONS (mm)

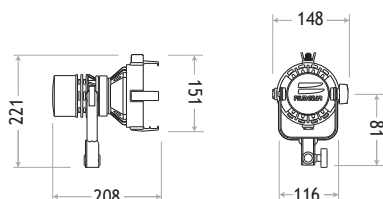

■ PHOTOMETRIC DATA

		2m	4m	6m
200W Spot (9°)	Lux	149430	37358	16603
	Beam Ø	0.31 m	0.63 m	0.94 m
Medium Flood (10° x 20°)	Lux	24443	6111	2716
	Beam Ø	0.35 x 0.71 m	0.70 x 1.41 m	1.05 x 2.12 m
Wide Flood (20° x 40°)	Lux	7625	1906	847
	Beam Ø	0.71 x 1.46 m	1.41 x 2.91 m	2.12 x 4.37 m
Super Wide Flood (40°)	Lux	2955	739	328
	Beam Ø	1.46 m	2.91 m	4.37 m
Frosted Super Flood (32°)	Lux	2273	568	253
	Beam Ø	1.15 m	2.29 m	3.44 m

■ LAMPHAED CONTENTS

- Lamp Housing without Bulb (purple grey color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Set of 5 Par Lenses Ø112mm (4-3/8 in.) with Lens Case
- Power Cable with Multi-Pin Connector
- Stirrup with Ø16mm (5/8 in.) Socket
- Glass Beaker
- # Requires Electronic Ballast, Lamphed to Ballast Cable and Lamp Bulb

■ ACCESSORIES

- Electronic Ballast V3 : 400W/200W or 400W/200W AC/DC or 200W, 200W AC/DC
- Lamphed to Ballast Cable : 7m (23 ft.) or 15m (49 ft.)
- DC Cable
- 4-leaf Rotatable Barndoor
- Set of 5 Par Lenses Ø130mm (5-1/8 in.) with Lens Case
 - Spot, Medium Flood, Wide Flood, Super Wide Flood, Frosted Super Flood
- Glass Beaker
- Safety Cable (for lamphed)
- Safety Wire (for barndoor)