

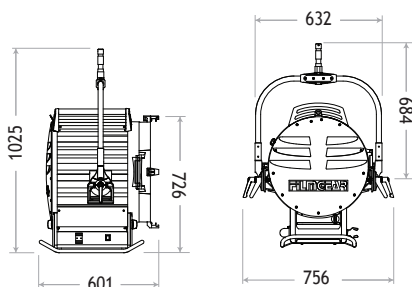
Daylight Fresnel 9kW/6kW SE





SPECIFICATIONS

Identity No.	L09060DS
Capacity	9,000W / 6,000W
Lamp Bulb Voltage	160V / 125V
Fresnel Lens	Ø450mm (17-3/4 in.)
Lamp Type	CSR 9000/SE/HR or HMI 9000W/SE MSR 6000/HR or HMI 6000W/SE
Color Temp.	5600K
Lamp Holder	GX38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	220 °C / 200 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	15 m / 12 m
Min. Distance to Flammable Object	1.5 m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	38.7 kg
Weight (with barndoor)	43.7 kg

DIMENSIONS (mm)



PHOTOMETRIC DATA

	8m	14m	20m		8m	14m	20m
	9000W				6000W		
Spot (6°)				Spot (6°)			
Lux	94000	33000	17000	Lux	59653	19479	9545
Beam Ø	0.84 m	1.47 m	2.10 m	Beam Ø	0.84 m	1.47 m	2.10 m
Flood (65°)				Flood (65°)			
Lux	6000	2000	1080	Lux	4498	1469	720
Beam Ø	10.19 m	17.84 m	25.48 m	Beam Ø	10.19 m	17.84 m	25.48 m

LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
 - 4-leaf Rotatable Barndoor with Safety Wire
 - Ø450mm (17-3/4 in.) Fresnel Lens
 - Power Cable with Multi-Pin Connector
 - Stirrup with Ø28mm (1-1/8 in.) Spigot
- # Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

ACCESSORIES

- Electronic Ballast V3 : 12kW/9kW/6kW or 9kW/6kW
- Lamphead to Ballast Cable : 7m (23 ft.) or 15m (49 ft.)
- 4-leaf Rotatable Barndoor
- Set of 4 Scrims Ø533mm (21 in.) : Full Single, Full Double, Half Single, Half Double
- Scrim Bag
- Safety Cable (for lamphead)
- Safety Wire (for barndoor)