


Daylight Fresnel 6000W SE



■ SPECIFICATIONS

Identity No.	L06000DS
Capacity	6,000W
Lamp Bulb Voltage	125V
Fresnel Lens	Ø450mm (17-3/4 in.)
Lamp Type	MSR 6000HR or HMI 6000W/SE
Color Temp.	5600K
Lamp Holder	GX38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	200 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	12 m
Min. Distance to Flammable Object	1.5 m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	37.6 kg
Weight (with barndoor)	42.6 kg

■ DIMENSIONS (mm)

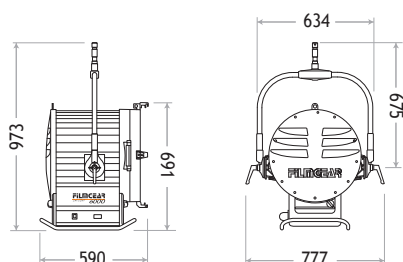

■ PHOTOMETRIC DATA

	8m	14m	20m
6000W			
Spot (6°)			
Lux	59653	19479	9545
Beam Ø	0.84 m	1.47 m	2.10 m
Flood (65°)			
Lux	4498	1469	720
Beam Ø	10.19 m	17.84 m	25.48 m

■ LAMPHEAD CONTENTS

Lamp Housing without Bulb (purple grey & silver color)

4-leaf Rotatable Barndoor with Safety Wire

Ø450mm (17-3/4 in.) Fresnel Lens

Power Cable with Multi-Pin Connector

Stirrup with Ø28mm (1-1/8 in.) Spigot

Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

■ ACCESSORIES

Electronic Ballast V3 : 18kW/12kW/6kW or 12kW/9kW/6kW or 12kW/6kW or 9kW/6kW or 6000W

Lamphead to Ballast Cable : 7m (23 ft.) or 15m (49 ft.)

4-leaf Rotatable Barndoor

Set of 4 Scrims Ø533mm (21 in.) : Full Single, Full Double, Half Single, Half Double

Scrim Bag

Safety Cable (for lamphead)

Safety Wire (for barndoor)