


## Daylight Fresnel 4000W SE



### ■ SPECIFICATIONS

Identity No.	L04000DS
Capacity	4,000W
Lamp Bulb Voltage	200V
Fresnel Lens	Ø300mm (11-3/4 in.)
Lamp Type	MSR 4000HR or HMI 4000W/SE
Color Temp.	5600K
Lamp Holder	G38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	170 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	10 m
Min. Distance to Flammable Object	1.2 m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	21.8 kg
Weight (with barndoor)	24.3 kg

### ■ DIMENSIONS (mm)

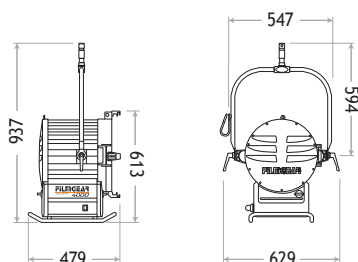

### ■ PHOTOMETRIC DATA

	5m	10m	15m
4000W			
Spot (6°)			
Lux	75144	18786	8349
Beam Ø	0.52 m	1.05 m	1.57 m
Flood (64°)			
Lux	6961	1740	773
Beam Ø	6.25 m	12.50 m	18.75 m

### ■ LAMPHEAD CONTENTS

Lamp Housing without Bulb (purple grey & silver color)

4-leaf Rotatable Barndoor with Safety Wire

Ø300mm (11-3/4 in.) Fresnel Lens

Power Cable with Multi-Pin Connector

Stirrup with Ø28mm (1-1/8 in.) Spigot

# Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

### ■ ACCESSORIES

Electronic Ballast V3 : 6kW/4kW or 4kW/2.5kW

Lamphead to Ballast Cable : 7m (23 ft.) or 15m (49 ft.)

4-leaf Rotatable Barndoor

Set of 4 Scrims Ø394mm (15-1/2 in.) : Full Single, Full Double, Half Single, Half Double

Scrim Bag

Safety Cable (for lamphead)

Safety Wire (for barndoor)