

FACETED




Daylight Par Faceted F4k


■ SPECIFICATIONS

Identity No.	L04000FP
Capacity	4,000W
Lamp Bulb Voltage	200V
UV Protective Lens	Ø335 mm
Lamp Type	MSR 4000HR or HMI 4000W/SE
Color Temp.	5600K
Lamp Holder	G38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	190 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	10 m
Min. Distance to Flammable Object	1 m
Operating Range	+45° ~ 0° ~ -45°
Weight (Lamphead)	19.0 kg
Weight (with barndoor)	22.0 kg

■ DIMENSIONS (mm)

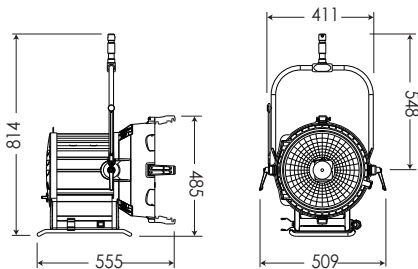

■ PHOTOMETRIC DATA

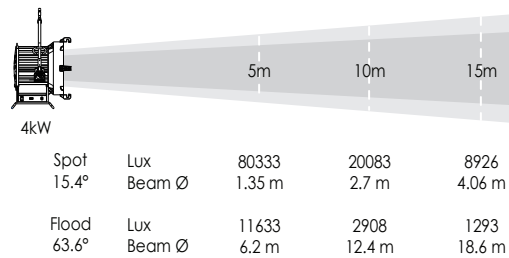

■ LAMPHEAD CONTENTS

Lamp Housing without Bulb (purple grey & silver color)

4-leaf Rotatable Barndoor with Safety Wire

Ø335mm UV Protective Lens

Power Cable with Multi-Pin Connector

Stirrup with Ø28mm (1-1/8 in.) Spigot

Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

■ ACCESSORIES

Electronic Ballast V3 : 6kW/4kW or 4kW/2.5kW

Lamphead to Ballast Cable : 7m (23 ft.) or 15m (49 ft.)

4-leaf Rotatable Barndoor

Set of 4 Scrims Ø394mm (15-1/2 in.) : Full Single, Full Double, Half Single, Half Double

Scrim Bag

Safety Cable (for lamphead)

Safety Wire (for brandoor)